

# New SU100 Series Single-Use BPC Gas Wells

*SingleSense™*

## Upstream Applications

## SU100 Series Single-Use BPC Gas Wells for DO and CO<sub>2</sub> Sensors

[SU100 series gas wells](#) are designed for preinstallation into a bioprocessing container (BPC) with subsequent gamma sterilization. Each gas well features a steel mesh reinforced, gas permeable silicone rubber membrane. The sensor works behind the membrane to measure gas partial pressure of the BPC media. The gas well's rugged membrane is rated to 30 psig and provides a sterile barrier that eliminates the need to autoclave sensors, saving time and reducing the risk of media contamination or sensor damage.

### Features and Benefits of SU100 Series Gas Wells:

---

The contents of this publication are presented for information purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding products or services described herein or in their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the design or specification of such products at any time.

© 2022 Broadley-James Corporation. All rights reserved. Visit [www.broadley-james.com/trademarks](http://www.broadley-james.com/trademarks) for trademark information.

TMP-BF-102101



#### North America and Pacific

Email: [helpdesk@broadleyjames.com](mailto:helpdesk@broadleyjames.com)  
Web: [www.broadleyjames.com](http://www.broadleyjames.com)

Phone: 949-829-5555  
Tollfree: 800-288-2833  
Fax: 949-829-5560


19 Thomas, Irvine CA, 92618 USA

#### United Kingdom and EU Countries

Email: [sales@broadleyjames.co.uk](mailto:sales@broadleyjames.co.uk) Phone: +44 (0)1525 862518  
Web: [www.broadleyjames.eu](http://www.broadleyjames.eu) Fax: +44 (0)1525 862811

Wrest Park, Silsoe Beds MK45 4HS, UK

# New SU100 Series Single-Use BPC Gas Wells

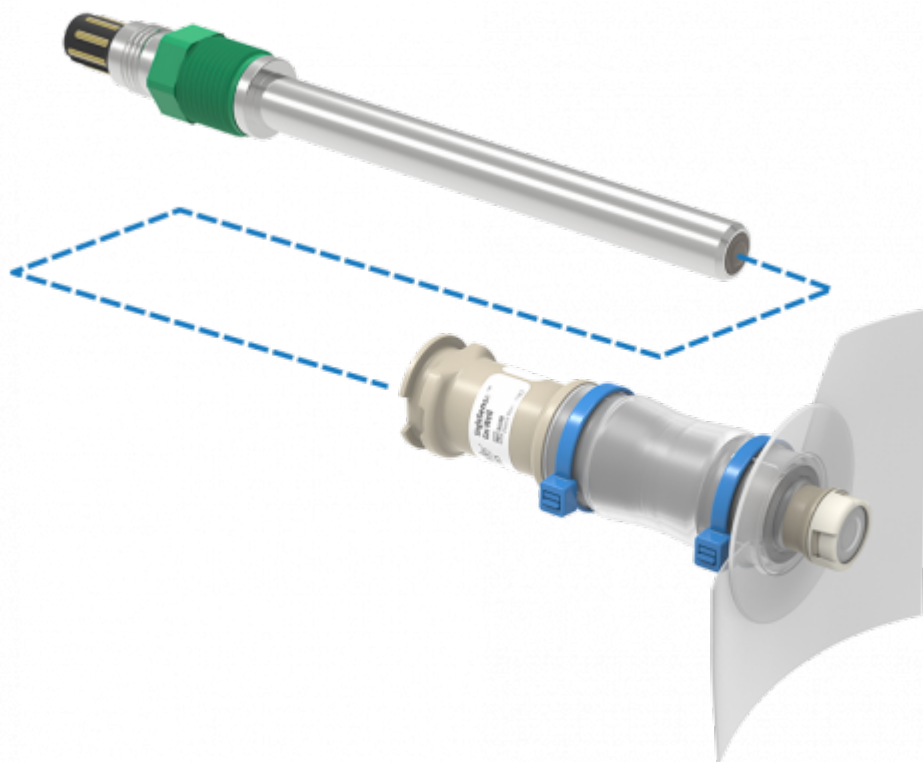

- Gas well's steel mesh reinforced, gas permeable membrane is a sterile barrier, eliminating the risk of damaging sensors from autoclaving
- Gas well eliminates need to insert sensor directly into BPC, reducing risk of BPC media contamination
- The membrane is pressure rated to 30 psig

The contents of this publication are presented for information purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding products or services described herein or in their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the design or specification of such products at any time.

© 2022 Broadley-James Corporation. All rights reserved. Visit [www.broadley-james.com/trademarks](http://www.broadley-james.com/trademarks) for trademark information.

TMP-BF-102101