

# New SU800 Single-Use pH Sensor for Bioprocess Applications

*SingleSense™*

## Upstream and Downstream Applications

## Model SU800 Single-Use pH Sensor for Use with BPCs

The [SU800](#) is a new, single-use pH sensor designed for preinstallation into any bioprocessing container (BPC) with a standard 1-inch hose barb port. The sensor is a small, single-use insertion/retraction assembly designed with a built-in buffer storage chamber with electrolyte for long-term storage or to perform a 1-point standardization. The sensor can be inserted and retracted multiple times without the loss of storage electrolyte into the media. The sensor can be used for upstream and downstream bioprocess applications, including media mixing, buffer prep, and large-scale cell culture.

### Features and Benefits of the SU800 Series:

---

The contents of this publication are presented for information purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding products or services described herein or in their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the design or specification of such products at any time.

© 2022 Broadley-James Corporation. All rights reserved. Visit [www.broadley-james.com/trademarks](http://www.broadley-james.com/trademarks) for trademark information.

TMP-BF-102101



#### North America and Pacific

Email: [helpdesk@broadleyjames.com](mailto:helpdesk@broadleyjames.com)  
Web: [www.broadleyjames.com](http://www.broadleyjames.com)

Phone: 949-829-5555  
Tollfree: 800-288-2833  
Fax: 949-829-5560


19 Thomas, Irvine CA, 92618 USA

#### United Kingdom and EU Countries

Email: [sales@broadleyjames.co.uk](mailto:sales@broadleyjames.co.uk) Phone: +44 (0)1525 862518  
Web: [www.broadleyjames.eu](http://www.broadleyjames.eu) Fax: +44 (0)1525 862811

Wrest Park, Silsoe Beds MK45 4HS, UK

# New SU800 Single-Use pH Sensor for Bioprocess Applications

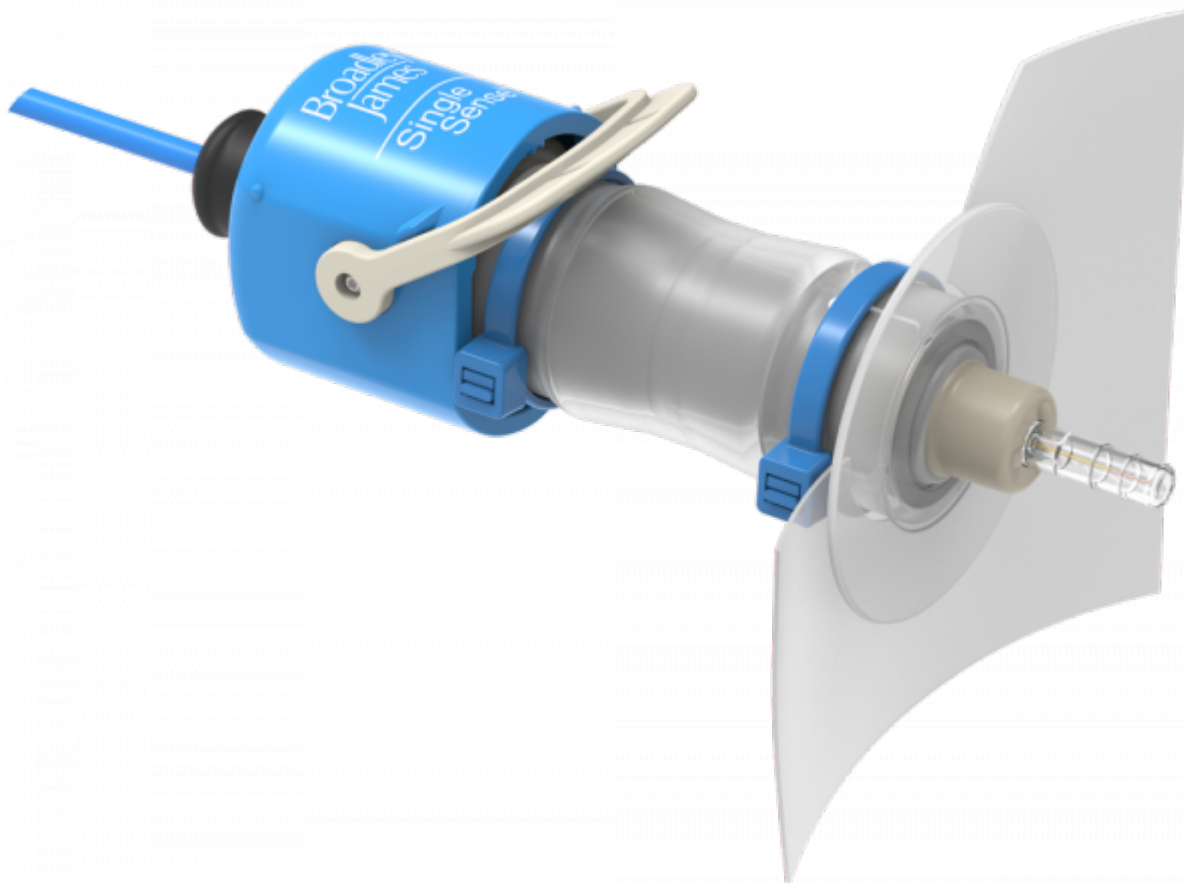

- 30-month shelf life after preinstallation and gamma sterilization
- Rugged, always ready to use, no rehydration time required
- No leakage into the BPC media when in inserted or retracted position
- Operator can perform 1-point standardization in retracted position
- Eliminates risk of contamination via insertion of autoclaved sensor

The contents of this publication are presented for information purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding products or services described herein or in their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the design or specification of such products at any time.

© 2022 Broadley-James Corporation. All rights reserved. Visit [www.broadley-james.com/trademarks](http://www.broadley-james.com/trademarks) for trademark information.

TMP-BF-102101