


# Are there different types of ports?

The electrode housing is designed to hold and protect the pH electrode while inserting it into the bioprocess vessel. There are various types of side entry ports and different groups of housings to fit each port type. The size and make of the port must first be identified in order to narrow the selection process.

The most common types of entry ports found on pilot and production scale vessels are as follows:


## Standard 25mm Side Port

Found on nearly all vessels other than those manufactured by B. Braun Biotech. The port bore is 25 mm i.d. and the housing o-ring seals to the inside of the port. The housing is then secured to the port by a threaded retainer ring. The port is installed at a 15° angle for better electrode performance. See the cutaway drawing to the right for typical installation dimensions.



## B. Braun Biotech 25 mm Safety Port

Found exclusively on vessels manufactured by B. Braun Biotech. This style of port is longer than the standard port and needs a special housing to fit correctly. (Note: the port opening on newer tanks is 30 mm i.d. and the port narrows down to 25 mm i.d. at the critical point where the housing o-ring seals to the inside wall of the port.) Again, the port is installed at a 15° angle for better electrode performance. See the cutaway drawing to the right for typical installation dimensions.

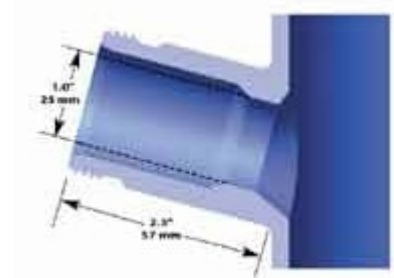

The contents of this publication are presented for information purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding products or services described herein or in their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the design or specification of such products at any time.

© 2022 Broadley-James Corporation. All rights reserved. Visit [www.broadley-james.com/trademarks](http://www.broadley-james.com/trademarks) for trademark information.

TMP-BF-102101